


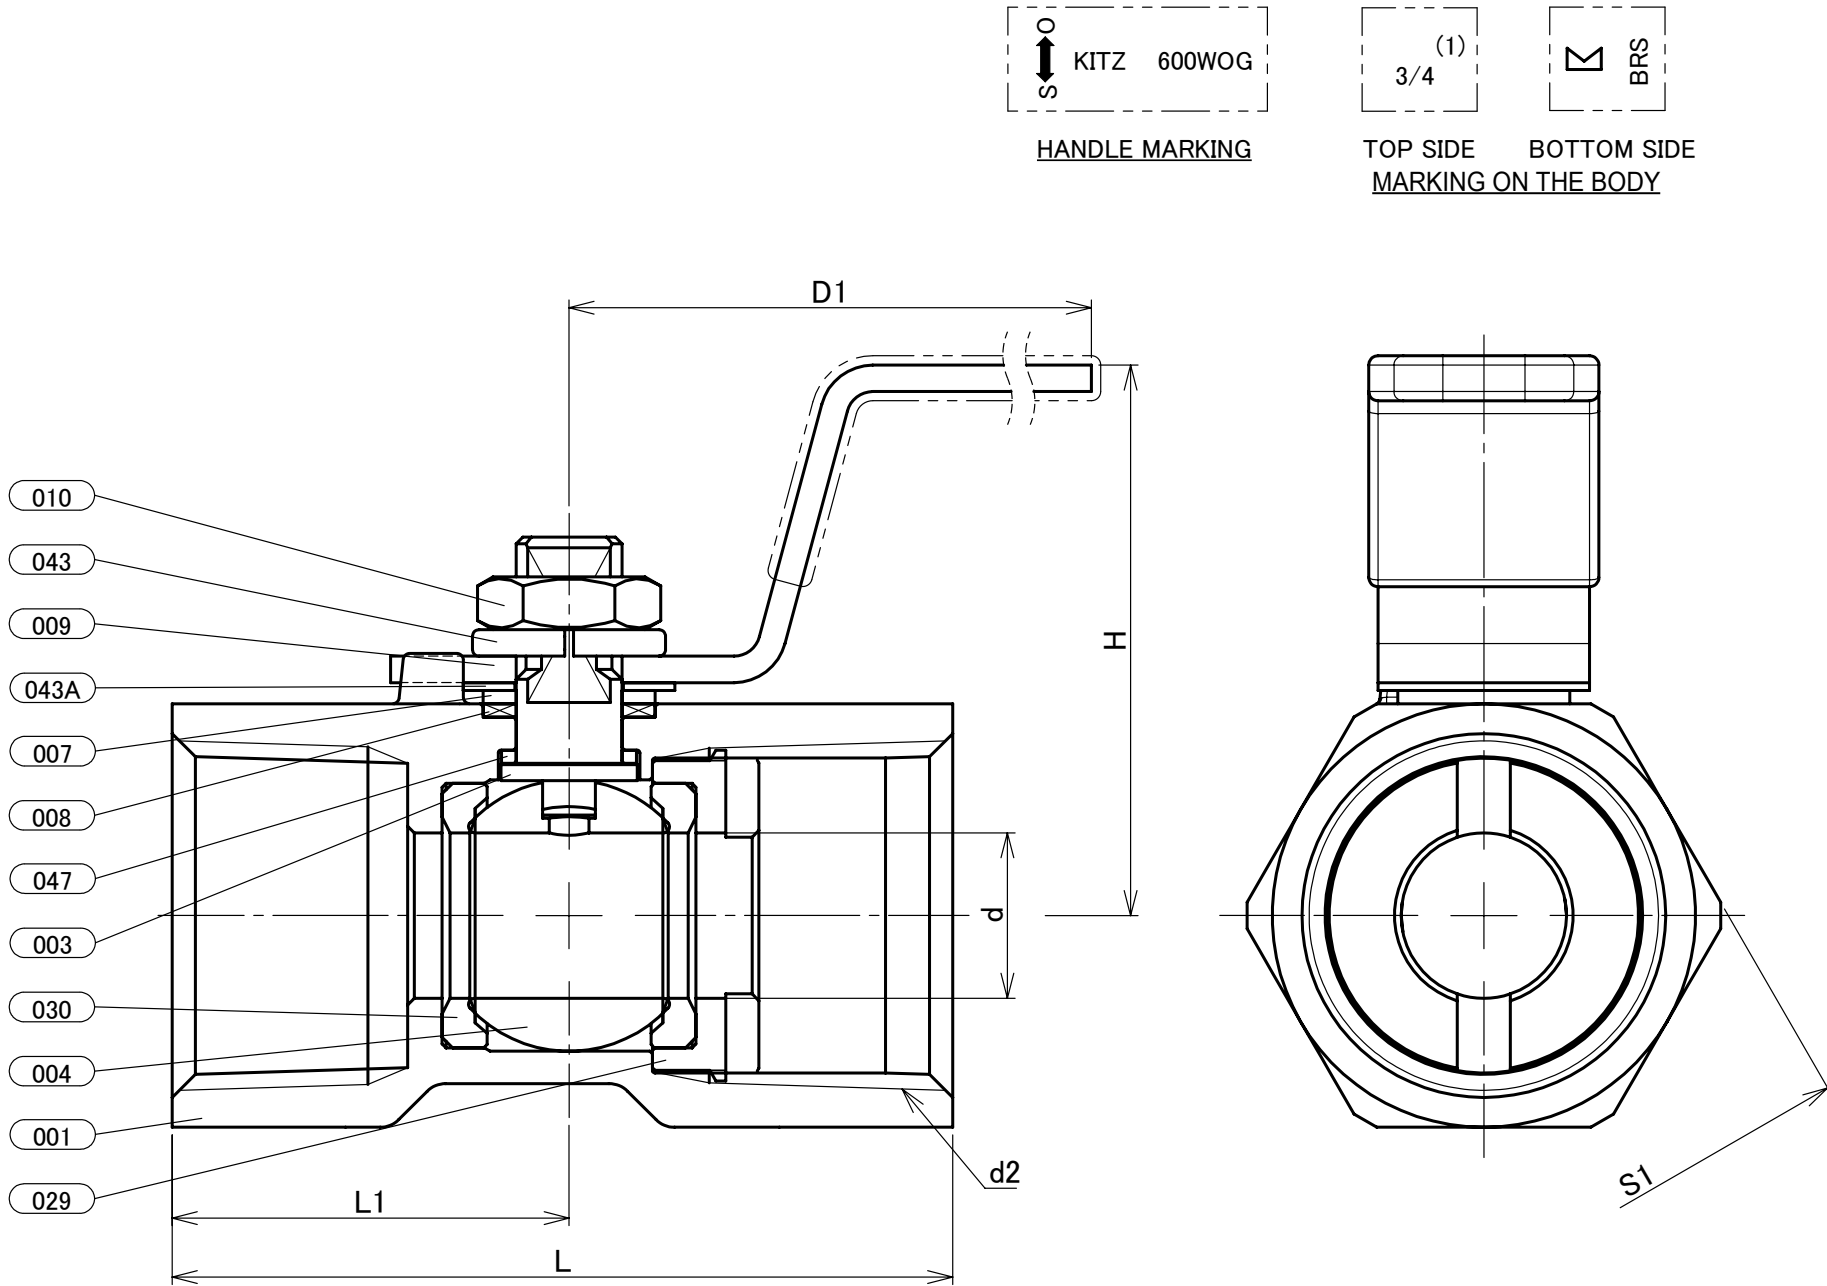

DIMENSIONS		UNIT:mm							
NOMINAL SIZE		d	H	D1	L	d2	S1	L1	
B	A								
3/8	10	6.8	35	70	44	Rc3/8	21	21	
1/2	15	9.2	38	85	56.5	Rc1/2	25	27.5	
3/4	20	12.5	42	85	59	Rc3/4	32	30	
1	25	16	47	100	71	Rc1	38	36	

NOTE (1) VALVE SIZE IDENTIFICATION.
(2) DEZINCIFICATION RESISTANT BRASS : NO.003.
(3) Cr PLATING : NO.004.
(4) PLASTIC COVERING : NO.009.
(5) CHANGE OF SHAPE WHICH WILL NOT AFFECT THE VALVES IN THE DIMENSION TABLE,
OR RIB AND BOSSES WHICH WILL NOT AFFECT THE VALVE INSTALLATION MAY NOT BE SHOWN IN THIS DRAWING.

NO.	NAME OF PARTS	Q'TY	MATERIALS	SPECIFICATIONS
001	BODY	1	FORGED BRASS	C3771
003	STEM	1	BRASS	C3531
004	BALL	1	FORGED BRASS	C3771
007	GLAND	1	STAINLESS STEEL	SUS430
008	GLAND PACKING	1S	G/F PTFE	
009	HANDLE	1	STAINLESS STEEL	
010	NUT	1	CARBON STEEL	
029	INSERT	1	FORGED BRASS	C3771
030	BALL SEAT	2	G/F PTFE	
043	WASHER	1	CARBON STEEL	
043A	CONED DISC SPRING	1	STAINLESS STEEL	
047	THRUST WASHER	1	REINFORCED PTFE	

STANDARD	MARKING	
	FACE TO FACE OR END TO END	KITZ STANDARD
	END CONNECTION	JIS B0203
	WALL THICKNESS	KITZ STANDARD
	PRESSURE TEST	KITZ STANDARD
PRODUCT CODE		
FIGURE		TK
TYPE 600 FORGED BRASS BALL VALVE SCREWED ENDS		
REDUCED BORE		
DRAWING NO.		REV
R10-008416		01
KITZ CORPORATION		

DATE APPD	2022/03/29
APPD BY	N.Hotta
CHKD BY	Y.Asano
DRAWN BY	R.Shiraishi